

Dancing Fans

Quilt designed by Marinda Stewart. Quilt measures approximately 49" x 51"

Fabric	Yardage	Cutting
*CX3304 Black	3/4 yard	Centering the panel motif, cut one 23-1/2" x 43-1/2" piece.
**CM2531 Black	1-1/2 yards	Cut one 2-1/2" x 45-1/2" strip, two 3-1/2" x 45-1/2" strips and two 3-1/2" x 49-1/2" strips from the length of fabric.
CX3305 Black	3/8 yard	See applique instructions to cut six single fans and two fan pairs.
CM2822 Black	3/8 yard	Center each strip over on complete printed tile and cut two 1-1/2" x 43-1/2" strips, two 1-1/2" x 25-1/2" strips, one 1-1/2" x 14-1/2" strip, two 1-1/2" x 43-1/2" strips and two 1-1/2" x 16-1/2" strips.
Jet Black	1/2 yard	Cut five 2-1/4" x width of fabric strips and piece them together for the binding.
CX2781 Black	6" x 21-1/2"	Cut twelve 1-1/2" x 7-1/2" strips.
CX3163 Olive	6" x 19-1/2"	Cut twelve 1-1/2" x 6-1/2" strips.
CX3307 Red	6" x 19-1/2"	Cut twelve 1-1/2" x 6-1/2" strips.
CX3100 Thyme	6" x 16-1/2"	Cut twelve 1-1/2" x 5-1/2" strips.
CM1713 Cherry	6" x 16-1/2"	Cut twelve 1-1/2" x 5-1/2" strips.
CX3184 Olive	6" x 13-1/2"	Cut twelve 1-1/2" x 4-1/2" strips.
CX3060 Lava	6" x 13-1/2"	Cut twelve 1-1/2" x 4-1/2" strips.
CM2821 Olive	3" x 21"	Cut twelve 1-1/2" x 3-1/2" strips.
CX3184 Orange	3" x 21"	Cut twelve 1-1/2" x 3-1/2" strips.
CX3308 Olive	3" x 15"	Cut twelve 1-1/2" x 2-1/2" strips.
CX3184 Rose	3" x 15"	Cut twelve 1-1/2" x 2-1/2" strips.
CM2820 Red	3" x 9"	Cut twelve 1-1/2" x 1-1/2" squares.
CM1713 Black	3" x 9"	Cut twelve 1-1/2" x 1-1/2" squares.

*Or the amount needed to get a full repeat of the motif.

**Borders cut lengthwise to eliminate piecing. 5/8 yard if cut crosswise and pieced.

NOTE: Piecing seams will show.

You will also need:

54" x 56" piece for backing

54" x 56" piece of batting

Threads to match

Fusible web


Scissors, straight pins, rotary cutter, mat and acrylic rulers

Disclaimers

- This pattern is provided as a courtesy to quilt stores, catalogs and quilters. Michael Miller Fabrics, LLC is not responsible for the accuracy of any kits packaged to accompany this pattern. Please direct any inquires to the kit maker.
- Yardage requirements for this pattern may allow for excess yardage to accommodate specific placement of motifs or to allow for any fussy-cutting to achieve the finished quilt design.
- While every attempt has been made to give accurate measurements, yardage requirements and construction directions, this does not allow for personal variations in measuring, cutting and or sewing. the enclosed directions were used in the construction of the original quilt.

Assembly Instructions

- 01) Sew one 1-1/2" x 43-1/2" CM2822 strip to each side of the 23-1/2" x 43-1/2" CX3304 piece.
- 02) Sew one 1-1/2" x 25-1/2" CM2822 strips to the top and bottom of the CX3304 Black piece to make one panel unit. The panel unit should measure 25-1/2" x 45-1/2". Set aside.
- 04) To make one log cabin block, sew one 1-1/2" CM1713 black square to the bottom of one 1-1/2" CX2820 Red square to make the center unit.
- 05) Sew one 1-1/2" x 2-1/2" CX3184 Rose strip to the right side of the center unit.
- 06) Sew one 1-1/2" x 2-1/2" CX3308 Olive strip to the bottom of the center unit
- 07) Sew one 1-1/2" x 3-1/2" CM2821 Olive strip to the left side of the center unit.
- 08) Sew one 1-1/2" x 3-1/2" CX3184 Orange strip to the top of the center unit.
- 09) Sew one 1-1/2" x 4-1/2" CX3060 Lava strip to the right side of the center unit.
- 10) Sew one 1-1/2" x 4-1/2" CX3184 Olive to the bottom of of the center unit.
- 11) Sew one 1-1/2" x 5-1/2" CX3100 Thyme strip to the left of the center unit.
- 12) Sew one 1-1/2" x 5-1/2" CM1713 Cherry strip to the top of the center unit
- 13) Sew one 1-1/2" x 6-1/2" CX3307 Red strip to the right side of of the center unit.
- 14) Sew one 1-1/2" x 6-1/2" CX3163 Olive strip to the bottom of the center unit.
- 15) Sew one 1-1/2" x 7-1/2" CX2781 Black strip to the left side of the center unit.
- 16) Follow the block layout and Steps 2-15 and make twelve 7-1/2" x 7-1/2" unfinished log cabin blocks total.

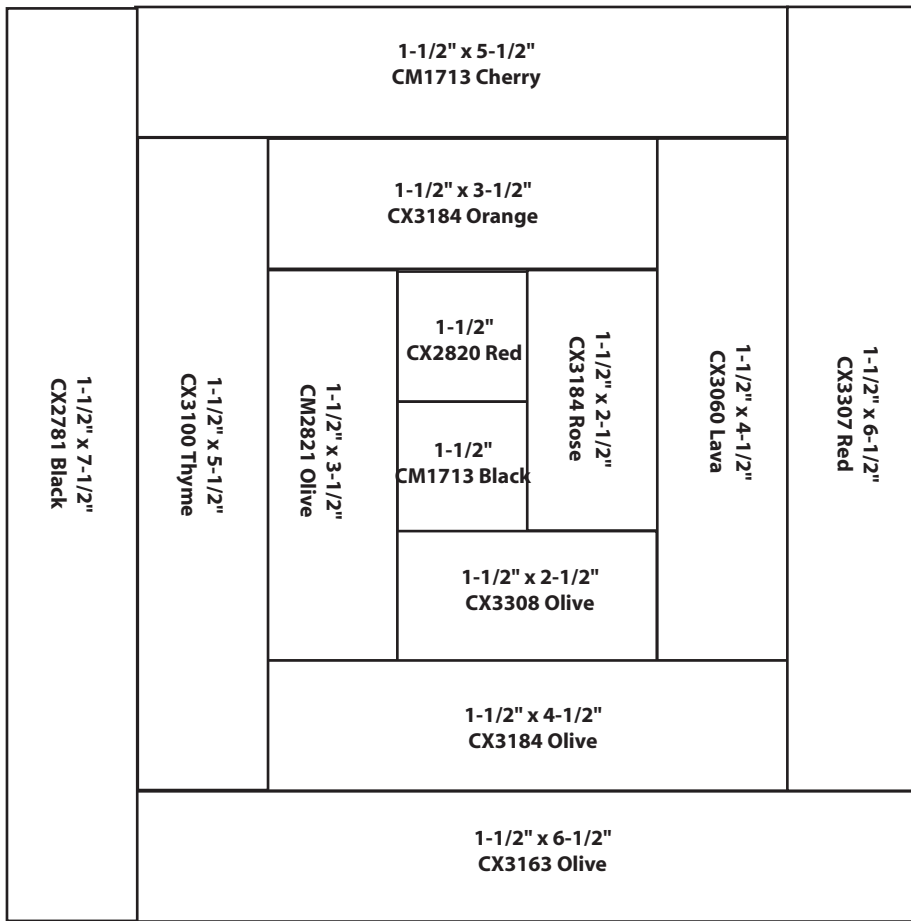

Block Layout

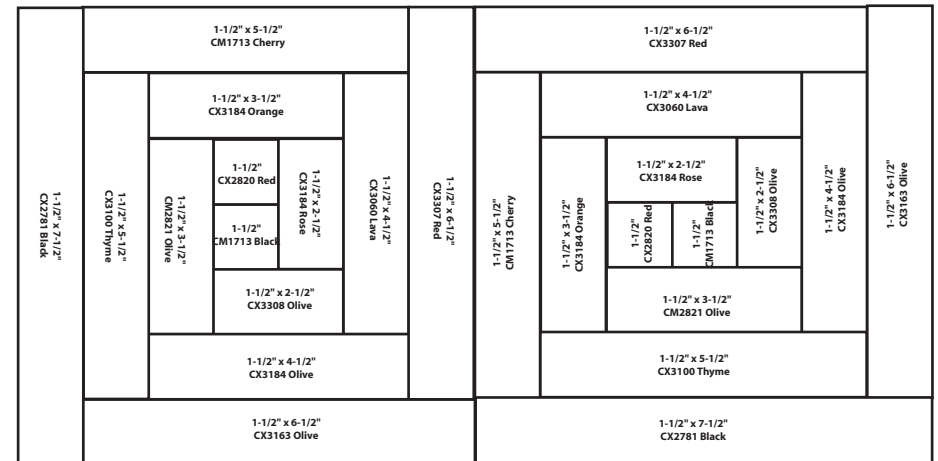


Figure 1

Fusible Applique Instructions

- 25) Following manufacturer's instructions, iron fusible web on the back side of CX3305 black fabric. Cut out five individual fans and two fan pairs from the fabric. Remove paper backing from the fans and arrange fans and fan pairs on quilt top as shown. in the quilt photo Fuse each fan into place. Machine satin stitch around all raw edges on the fans to finish.
- 26) Layer backing, batting and quilt top. Baste.
- 27) Quilt and bind as desired.

- 17) Sew two log cabin blocks together as shown in figure 1 to make one block pair. Repeat with the remaining blocks to make six block pairs total
- 18) Following the quilt photo, sew together three block pairs to make one 6-block unit. Repeat with remaining block pairs to make a second 6-block unit.
- 19) Refer to the quilt photo and sew one 1-1/2\" x 14-1/2\" CM2822 Black strip to the bottom of one 6-block unit. Sew the remaining 6-block unit to the bottom of the 1-1/2\" x 14-1/2\" CM2822 Black strip to make one log cabin panel.
- 20) Sew one 1-1/2\" x 43-1/2\" CM2822 Black strip to each side of the log cabin panel.
- 21) Sew one 1-1/2\" x 16-1/2\" CM2822 Black strip to the top and bottom of the log cabin panel. The completed panel should measure 16-1/2\" x 45-1/2\".
- 22) Sew the log cabin panel to the left side of one 2-1/2\" x 45-1/2\" CM2531 Black strip. Sew the panel unit from Step 2 to the right side of the 2-1/2\" x 45-1/2\" CX2531 strip to make the quilt top.
- 23) Sew one 3-1/2\" x 45-1/2\" CM2531 Black strip to each side of the quilt top.
- 24) Sew one 3-1/2\" x 49-1/2\" CM2531 Black strip to the top and bottom of the quilt top.

NOTE: If cutting the fabric crosswise instead of lengthwise, piecing is required to the necessary lengths.