Date: May.30.12

Making Waves

Size: 38″ x 57″

Quilt designed by Marinda Stewart
Level:Beginner

118 West 22nd Street 5th Floor New York, NY 10011
Tel: 212.704.0774 Fax: 212. 633. 0272 email: info@michaelmillerfabrics.com

www.michaelmillerfabrics.com

FABRIC REQUIREMENTS

DC5705 Navy
Making Waves
2/3 yard-1 Panel

DC5695 Navy
Point of Sail
1/4 yard

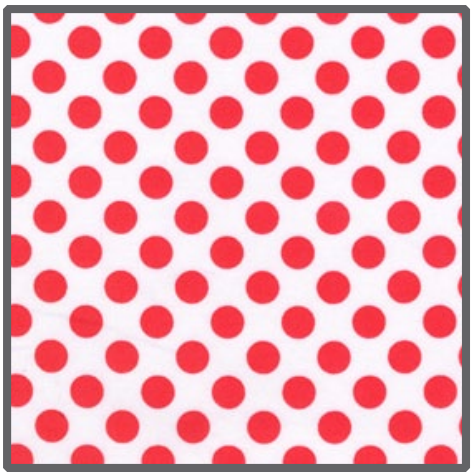

CX1492 Lipstick
Ta Dot
1/4 yard

DC5698 Turq
Mutiny on the Bunting
3/4 yard

K2269 (Dark Navy)
Krystal
3/8 yard

Backing & Batting 42” x 60”

"**Making Waves**"
Quilt by Marinda Stewart

Size: Approximately 38" x 57" Skill Level : Beginner

Materials

Fabric	Yardage	Cutting
DC5705 Navy Making Waves	2/3 yard-1 Panel	(1) 23" W x 43" H
DC5695 Navy Point of Sail	1/4 yard	(2) 1 1/2" x 43" (2) 1 1/2" x 26"
CX1492 Lipstick Ta Dot	1/4 yard	(2) 1 1/2" x 26" (2) 1 1/2" x 47" *
** DC5698 Turq Mutiny on the Bunting	3/4 yard	(2) 5 1/2" x 47" * (2) 5 1/2" x 38"
K2269 (Dark Navy) Krystal	3/8 yard	(5) 2 1/2" x W.O.F. - binding
* Pieced for length ** Fabric is one-way print. This quilt used 1 3/4 yards - (2) cut 47" vertically and (2) cut 5 1/2" horizontally. Excess fabric pieced into the quilt backing.		
Also Needed: 42" x 60" batting, 42" x 60" backing, threads to match, scissors, straight pins, acrylic ruler, rotary cutter, and mat.		

Disclaimers

This pattern is provided as a courtesy to quilt stores, catalogs, and quilters. Michael Miller Fabrics, LLC is not responsible for the accuracy of any kits packaged to accompany this pattern. Please direct any inquiries to the kit maker.

Yardage requirements for this pattern may allow for excess yardage to accommodate specific placement of motifs or to allow for any fussy-cutting to achieve the finished quilt design.

While every attempt has been made to give accurate measurements, yardage requirements, and construction directions; this does not allow personal variations in measuring, cutting, and or sewing. The enclosed directions were used in the construction of the original quilt.

Directions

1. Sew one DC5695 43" piece to each side of the DC5705 panel. Sew one DC5695 26" piece to each end.
2. Sew one CX1492 26" piece to the top and bottom of the panel. Sew one CX1492 47" piece (pieced for length) to each side.
3. Sew one DC5698 47" piece (pieced for length if needed) to each side. Sew one DC5698 38" piece to the top and bottom.
4. Layer backing, batting, and quilt top. Baste.
5. Quilt as desired.
6. Bind quilt using K2269 2 1/2" strips pieced as needed for length.