


USES PRE-CUTS

# DIAMONDS AT SEA

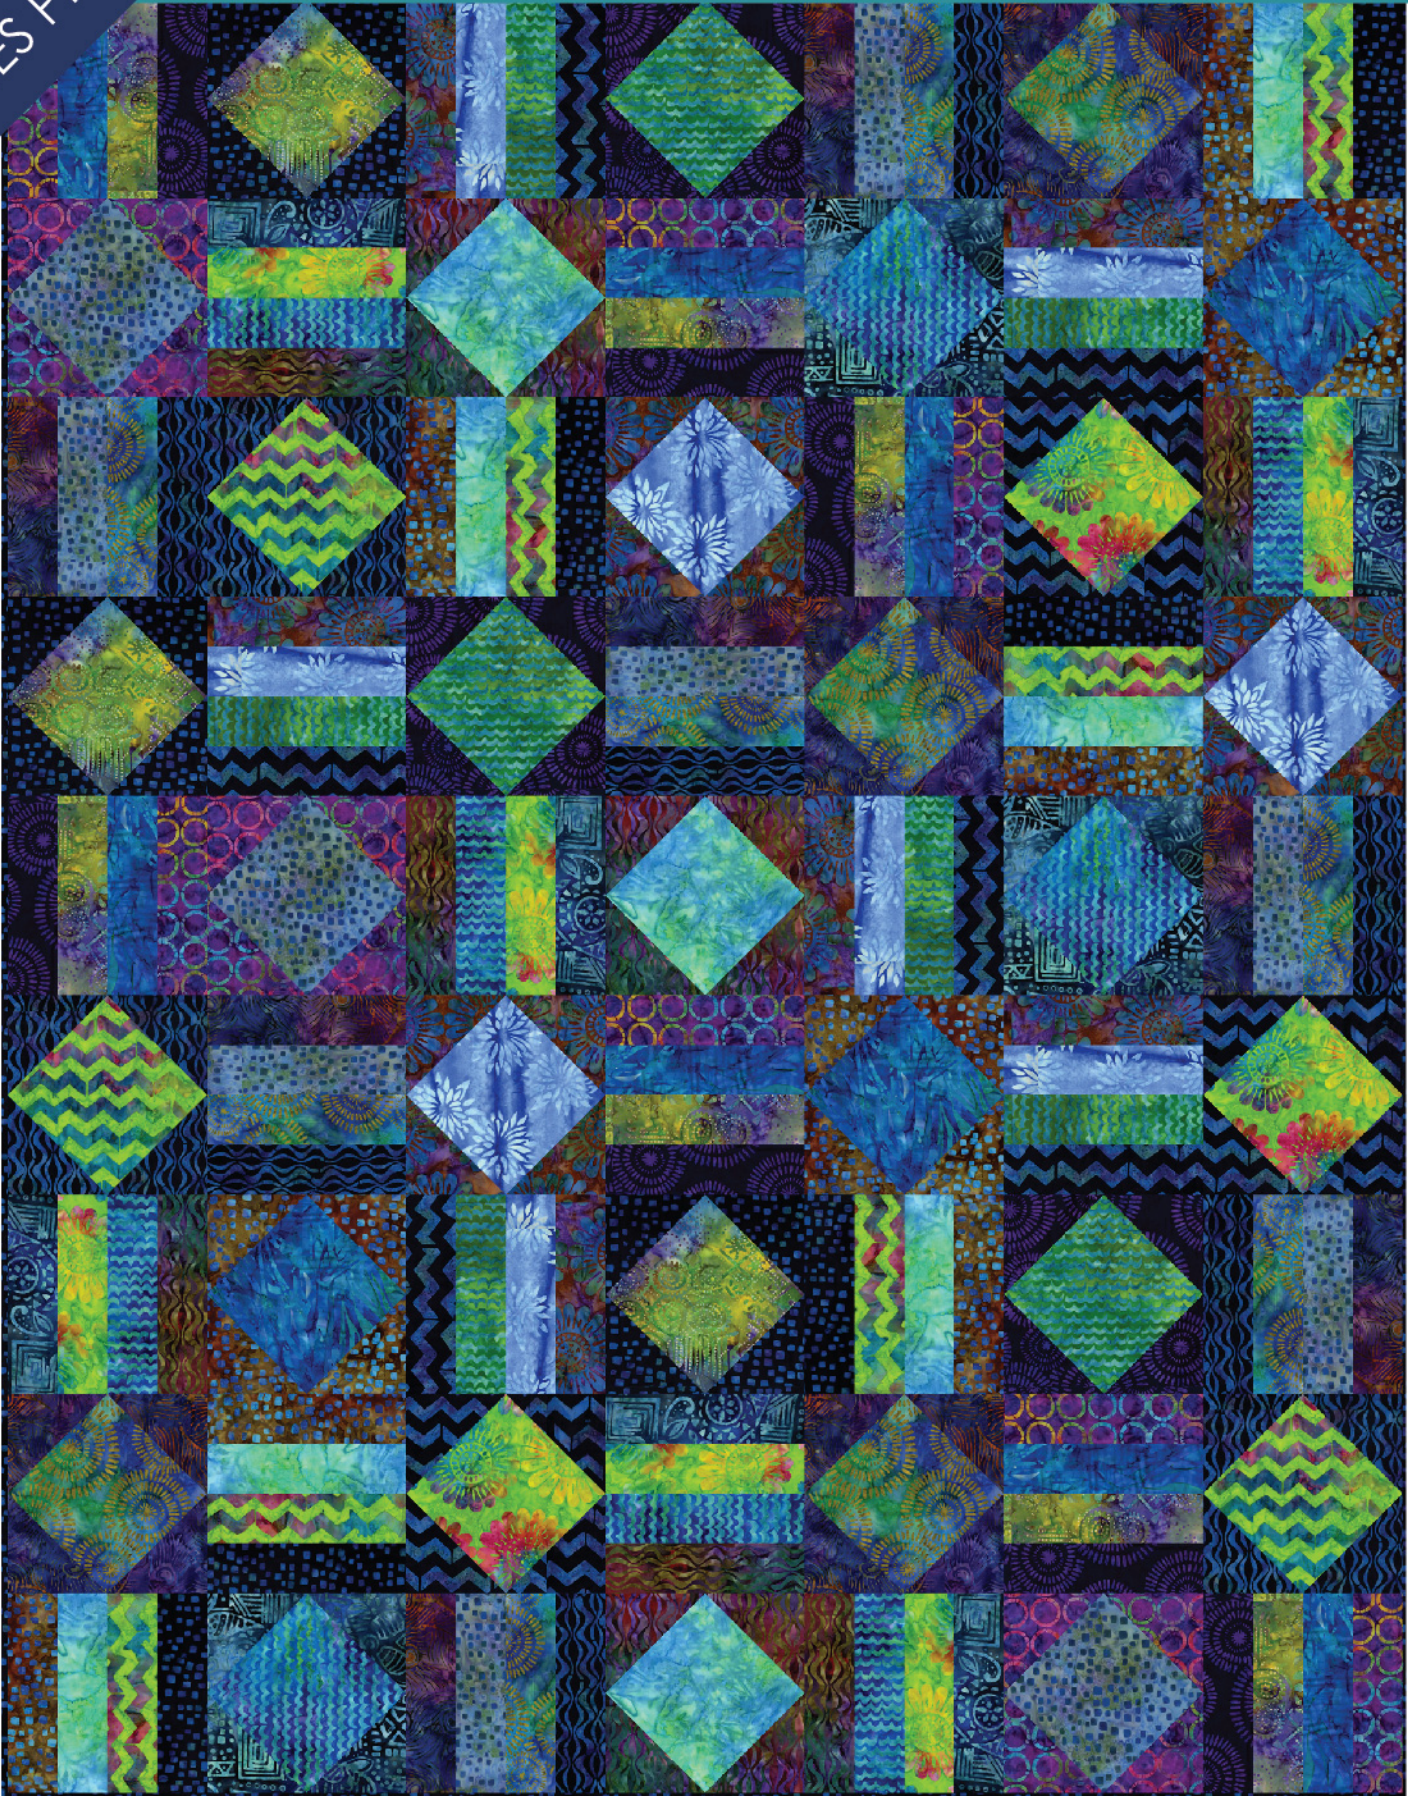

# FABRIC REQUIREMENTS

## AVAILABLE BATIK-BLUES PRE-CUTS:

SQUARE018 - (42) - 10" X 10" SQUARES (12/CASE)

CHARM033 - (42) - 5" X 5" SQUARES (24/CASE)

ROLL021 - (40) - 2 1/2" X 44" STRIPS (6/CASE)

FQ070 - (20) FAT QUARTER BUNDLE (3/CASE)




**SQUARE018 PRE-CUTS:**  
(10"x10") 2 PACKS



**ROLL021 PRE-CUTS:**  
(2 1/2" X WOF STRIPS) 1 PACK

## PACKS INCLUDE THE BELOW PRINTS:



BT6073\_AMETHYST



BT6254\_TURQUOISE



BT6369\_MERMAID



BT6382\_PLUM




BT6385\_MERMAID



BT6380\_MIDNITE



BT6247\_BLUE




BT6375\_JADE




BT6251\_GRAPE



BT6382\_LAGOON




BT6378\_NAVY




BT6374\_STREAM




BT6166\_CARIBBEAN



BT6380\_CALYPSO




BT6374\_MIDNITE




BT6374\_MERMAID




BT6385\_CALYPSO



BT6256\_BLUE



BT6378\_MERMAID



BT6375\_TURQUOISE

## MATERIALS

**SIZE:** Approximately 56" X 72"

**NOTE:** Our design used a matching **SQUARE018** and **ROLL021**

## CUTTING INSTRUCTIONS

**PLEASE NOTE:** All strips are cut across the width of fabric (WOF) from selvage to selvage edge.

	FABRIC	YARDAGE	CUTTING
SQUARE	SQUARE018 ( 12/CASE )	2 PACKS= (84) 10" SQUARES	<b>FROM 10" SQUARES:</b> _Select thirty-one squares, cut each to measure 8 1/2" square. _Select thirty-one squares, sub-cut each into four 4 1/2" squares (124 total)
ROLL	ROLL021 ( 6/CASE )	1 PACKS= (40) 2 1/2 X WOF STRIPS	<b>FROM 2 1/2" STRIPS:</b> _See rail fence block assembly instructions
BINDING	YOUR CHOICE	2/3 YARD	Cut seven 2 1/2" x WOF strips for the binding
BACKING	YOUR CHOICE	3 3/4 YARD	Cut two 64" x WOF strips. Piece the strips together and trim to make the 64" x 80" pieced backing.

**YOU WILL ALSO NEED:** 64" x 80" batting, threads to match, scissors, straight pins, acrylic ruler, rotary cutter and mat.



## Disclaimers

This pattern is provided as a courtesy to quilt stores, catalogs and quilters. Michael Miller Fabrics, LLC is not responsible for the accuracy of any kits packaged to accompany this pattern. Please direct any inquiries to the kit maker.

Yardage requirements for this pattern may allow for excess yardage to accommodate specific placement of motifs or to allow for any fussy-cutting to achieve the finished quilt design.

While every attempt has been made to give accurate measurements, yardage requirements and construction directions; this does not allow personal variations in measuring, cutting or sewing. The enclosed directions were used in the construction of the original quilt.

## Rail Fence Block Assembly

1. Select four 2 1/2" x WOF strips. Sew them together along the long edge to make one strip set (Fig. 1). Repeat to make eight strip sets total.
2. Cut the strip sets into thirty-two 8 1/2" rail blocks (Fig. 2).



Fig. 1

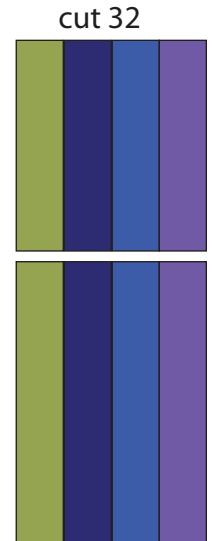


Fig. 2

## Diamond Block Assembly

3. Pair up four matching 4 1/2" squares with one 8 1/2" square for each diamond block. You will need thirty-one sets total.
4. Place one 4 1/2" square on the top left corner of the 8 1/2" square, right sides together (Fig. 3). Sew along the diagonal of the smaller square from the upper right corner to the lower left corner (Fig. 3). Flip open the triangle formed and press (Fig. 4). Trim away the excess fabric from behind the triangle 1/4" away from the sewn seam.
5. Follow Figure 5 for the seam direction to add a 4 1/2" square to each of the remaining corners of the 8 1/2" square to make one Diamond block (Fig. 6).
6. Repeat 4-5 to make thirty-one diamond blocks total.




Fig. 3




Fig. 4




Fig. 5

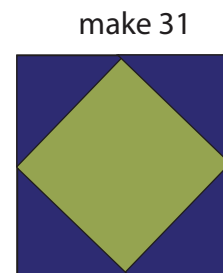


Fig. 6

### **Quilt Top Assembly**

7. Sew together four rail fence blocks and three diamond blocks, alternating them to make Row 1. Repeat to make Row 3, 5, 7 and 9.
8. Sew together four diamond blocks and three rail fence blocks, alternating them to make Row 2. Repeat to make Row 4, 6 and 8.
9. Sew the rows together in numerical order to make the quilt top.
10. Layer and quilt as desired.
11. Sew the seven 2 ½" x WOF strips together, end-to-end with 45° seams, to make the binding. Fold this long strip in half lengthwise with wrong sides together and press
12. Bind as desired.