

MINKY

# Blossom Magical Parade Strip Quilt

SIZE : 58" x 58"



Free Pattern available on [michaelmillerfabrics.com](http://michaelmillerfabrics.com)

michael miller FABRICS

**- Free Store Model with Purchase as Shown on Cover -**

Get a Free Store Model 58" x 58" strip quilt featuring Blossom Magical Parade with an order of a casepack (the entire collection is 8 skus). All bolt sizes are 12 yards.

**Free Store Display - use style #GWP0001**



**SML7188\_ BLOSSOM  
MAGICAL PARADE**



**SML7190\_ WHITE  
MAGIC FOLK**




**SML7194\_ WHITE  
LUCKY STARS**



**BS7582\_ LIGHT PINK  
BELLA SNUGGLE**




**SMD7581\_ MOCHA  
SILKY MINKY DOTS SOLID**

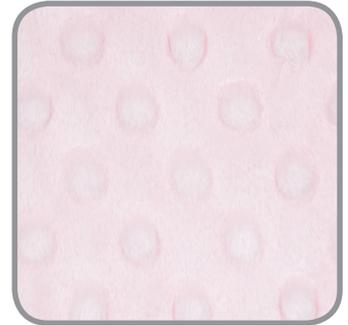

**SMD7581\_ BLUSH PINK  
SILKY MINKY DOTS SOLID**



**VS7584\_ WHITE  
MINKY VELVET SNUGGLE**

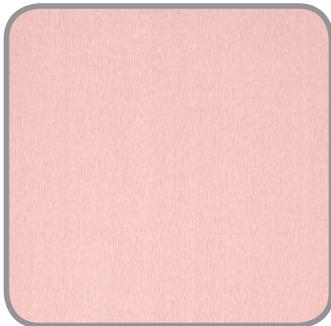

**SMS7580\_ CORAL  
SILKY MINKY SOLID**

# BASIC MINKY STRIP QUILT INSTRUCTIONS

48x58/60 approximately

Choose from a variety of combinations of the 10" strips. You will need 5 for the quilt top and one strip for your binding.

## Supply List

6 strips 10" x WOF ( width of fabric)  
(sub-cut in assorted sizes as desired)

Choose and Cut 1 of the 10" strips for binding  
(You will need 4 cuts 2" wide)

54x60 backing

54x60 batting

Spray adhesive (505)

Flower head pins

## Sewing and Basic Technique for Sewing Strip Quilts:

This quilt is sewn using the flip and sew method. Each strip is sewn on the foundation of the quilt sewing through all layers, backing and batting. This means the quilt is quilted when you are done!

1. Lay the batting on a flat surface. Place the backing fabric centered exactly on top of the batting. Spray fusible adhesive to hold batting to backing fabric.
2. Smooth out all wrinkle. Fold in half keeping the 60" wide horizontally. Mark the center of the backing and batting piece.
3. Lay the desired middle strip centered on the marked line. Use spray adhesive to secure in place.
4. Choose your next strip and pin in place with right sides together lining up seam on one side. Use a 3/8" to 1/2 " seam allowance to each strip. You will be sewing through the strip you pinned the center strip, the batting and the backing.
5. Smooth the strip right side up and spray to secure in place. Repeat step 4 on the other side of the middle strip.
6. Continue to sew strips alternating sides working from the middle. Repeat pinning and sewing continue until all strips are sewn. Baste the outer edge down before you attach binding. Trim all edges to even up.
7. Bind with 2" strips sewn together.

michael miller FABRICS 118 West 22nd Street, New York, NY 10011 • (212) 704-0774 • [www.michaelmillerfabrics.com](http://www.michaelmillerfabrics.com)



760 S. Crocker St. Los Angeles, CA 90021 213-629-2600

### Quilt Sewing Instructions

Step 1 - Take 2 strips and face them printed sides together - lining up all edges and taking care that the prints are facing the correct way

Sew only one edge together - running the stitch on the opposite plain side - leaving a 1/2" seam allowance

Step 2 - Open up the 2 sewn together panels and press open the seam, with findernail or iron.

Step 3 - Take a 3rd strip and face that right side together with either panel - lining up the edges perfectly - take care to make sure the prints are running the same direction, and repeat step 1. Continue step 3 with the remainder of the strips until all strips are sewn together. Once completed, you will have the face of the quilt.

### Batting

Lay quilt printed face down

Cut batting to size and lay on top of back side of quilt  
choose your backing and cut to size - laying it right side facing up

secure the 3 layers together temporarily with safety pins or a loose stitch

run a stitch all the way around the edge of the quilt - securing the 3 layers together

**Binding** - Apply binding to the edge of quilt

①




②



③




④

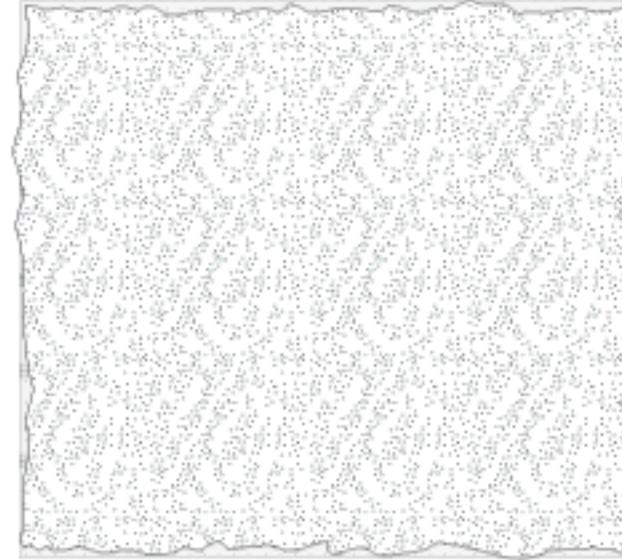

Lay completed quilt  
face down on work  
surface cut batting to size  
and lay on top

⑤

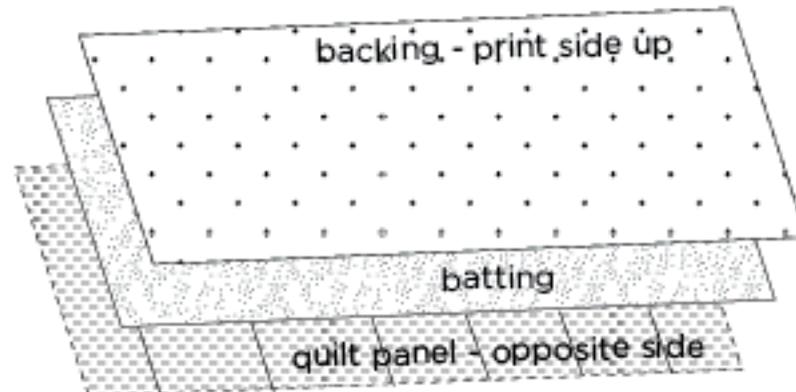

Choose a backing  
and cut to exact size  
as quilt panel and lay on top  
of batting, facing right side up

⑥

Sew all 3 layers together - leaving a 1/2" seam allowance

