


MINKY

# Kodiak Bear Grey Strip Quilt

SIZE : 58" x 58"

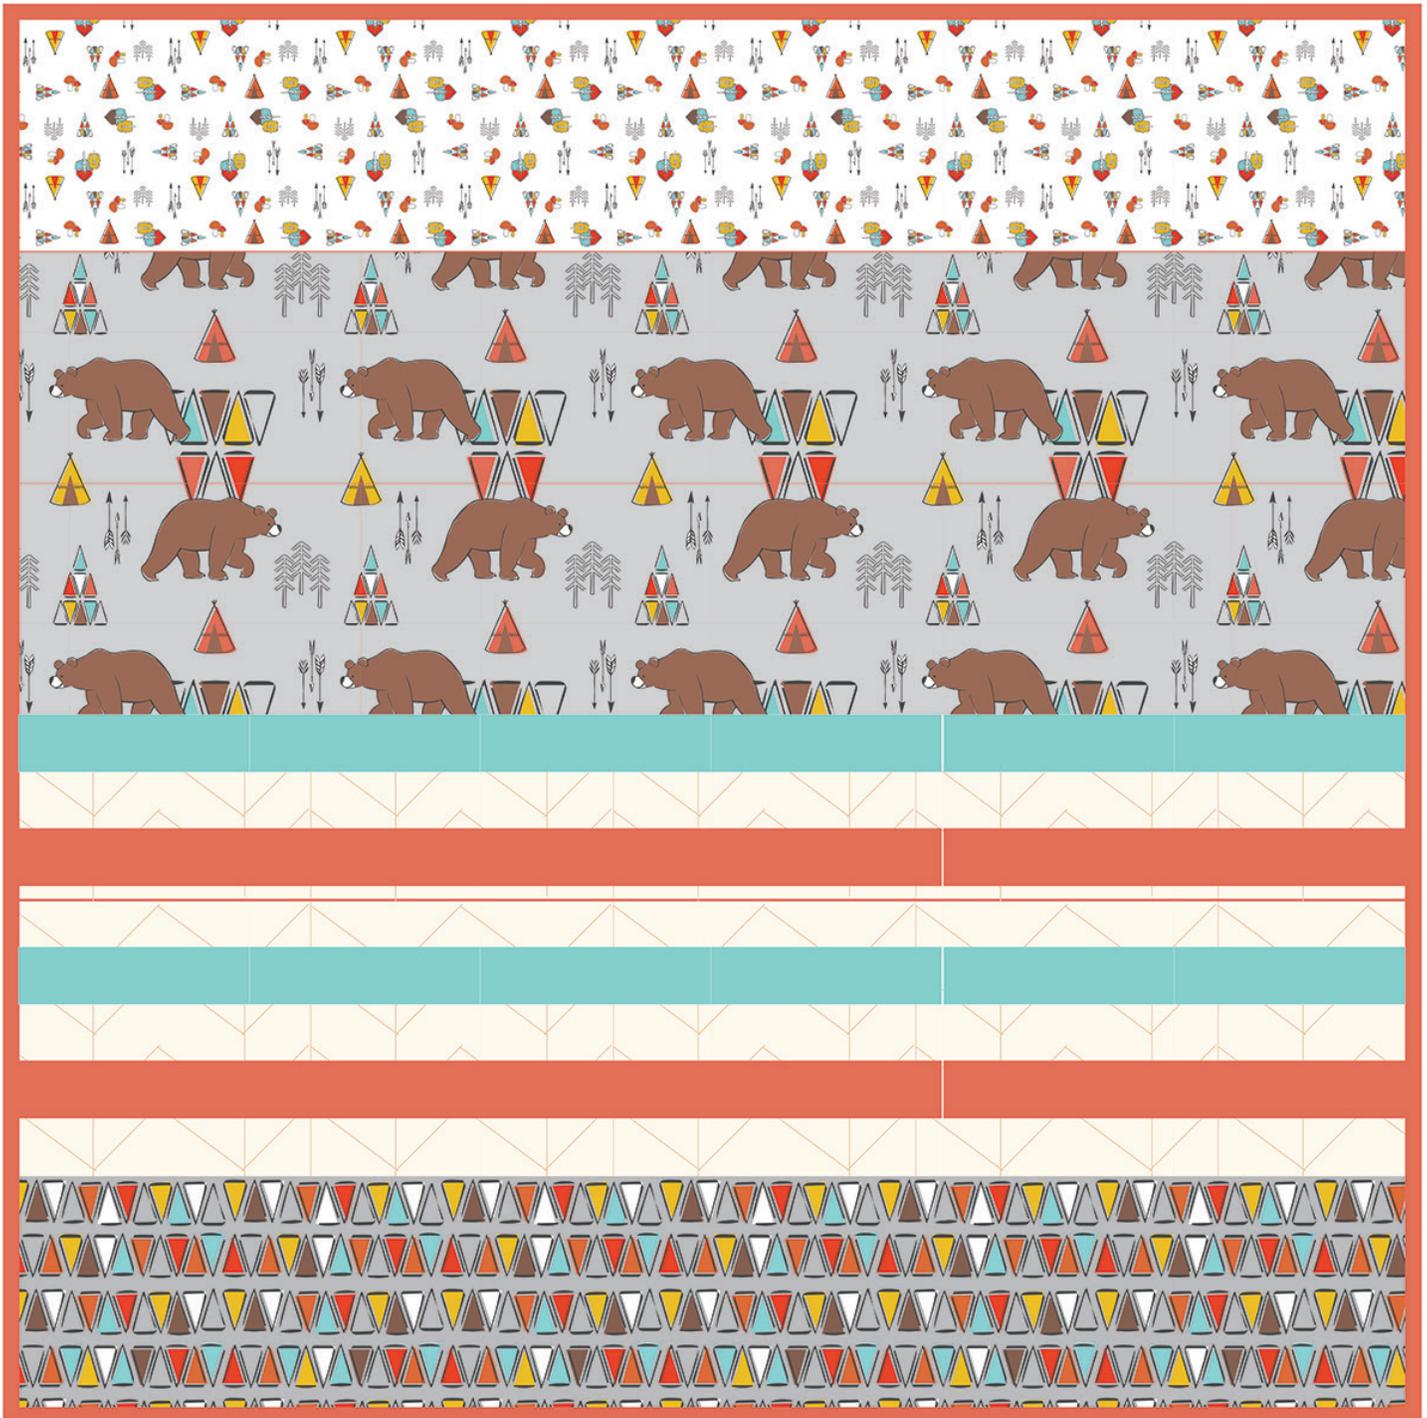


Free Pattern available on [michaelmillerfabrics.com](http://michaelmillerfabrics.com)

michael miller FABRICS

**- Free Store Model with Purchase as Shown on Cover -**

Get a Free Store Model 58" x 58" strip quilt featuring Kodiak Bear Grey with an order of a casepack (the entire collection is 8 skus). All bolt sizes are 12 yards.

**Free Store Display - use style #GWP0046**



**SMZ7680 WHITE  
KODIAK DITSY**




**SMZ7678 GRAY  
KODIAK BEAR**




**HS7585 CREAM  
HERRINGBONE SNUGGLE**



**SMZ7679 GRAY  
KODIAK TRIANGLE**




**SMS7580 SALMON  
SILKY MINKY SOLID**



**SMS7580 AQUA  
SILKY MINKY SOLID**



**BS7582 CHARCOAL  
BELLA SNUGGLE**



**SMZ7676 GRAY  
KODIAK ARROW TOSS**

## **Kodiak Bear Grey Strip Quilt      58" x 58"**

*Yardages based on fabric 58"-60" wide.*

Fabric A	SMZ7680 White	Kodiak Ditsy-White	1/3 yard
Fabric B	SMZ7678-Gray	Kodiak Bear-Gray	2/3 yard
Fabric C	SMZ7679-Gray	Kodiak Triangle-Gray	1/3 yard
Fabric D	SMS7580-Aqua	Silky Minky Solid-Aqua	1/4 yard
Fabric E	SMS7580-Salmon*	Silky Minky Solid-Salmon	5/8 yard
Fabric F	HS7585-Cream	Herringbone Snuggle-Cream	1/2 yard
Backing	Your Choice		1-3/4 yards

\*includes Binding

Cutting:

Fabric A, cut:

- (1) 10" x width of fabric (WOF) strip

Fabric B, cut:

- (1) 21" x WOF strip

Fabric C, cut:

- (1) 10" x WOF strip

Fabric D, cut:

- (2) 3 ½" x WOF strips

Fabric E, cut:

- (2) 3 ½" x WOF strips
- (5) 2" x WOF strips for the binding

Fabric F, cut:

- (4) 3 ½" x WOF strips

Backing, cut:

- (1) 60" x 60"

**You will also need:**

60x60 backing

58x58 batting (if desired)

Spray adhesive (505)

Flower head pins

Walking Foot (recommended)

### **Sewing and Basic Technique for Sewing Strip Quilts:**

This quilt is sewn using the flip and sew method. Each strip is sewn on the foundation of the quilt, sewing through all layers, backing and batting. This means the quilt is quilted when you are done!

1. Lay the backing fabric on a flat surface. Place the batting centered exactly on top of the backing. Spray fusible adhesive to hold batting to backing fabric.
2. Smooth out all wrinkles. Fold in half keeping the 60" wide horizontal. Mark the center of the backing and batting piece.
3. You will start with the third strip for this version. Lay the third strip on the batting, aligning the top edge with the marked line on the batting. Use spray adhesive to secure in place.
4. Choose your next strip and pin in place with right sides together, lining up the raw edges along one horizontal side. Use a 1/2" seam allowance to attach the strips to the batting and backing. You will be sewing through the strip you pinned, the center strip, the batting and the backing.
5. Smooth the strip right side up and spray to secure in place. Repeat step 4 on the other side of the middle strip.
6. Continue to sew strips alternating sides working from the middle. Repeat pinning and sewing until all strips are sewn. Baste the outer edge down before you attach binding. Trim all edges to even up.
7. Bind with 2" strips sewn together.

