

## **Fabric Requirements**



Finished Quilt Size: 54" x 80"

Skill Level: Beginner

#### Also Needed:

STRAIGHT PATH

BINDING: 1/2 yard

- 60" x 86" quilt batting.
- A rotary cutter, a long acrylic ruler, a 60° triangle acrylic ruler, cutting mat, thread, scissors, pins, pencil.

COTTON COUTURE

BACKING: 3 1/2 yards

#### **Cutting Instructions:**

- Binding Fabric

- Cut 7 rows 2 1/4" x width of fabric (WOF). Set aside for binding.

- Backing Fabric.

- Cut 2 pieces 60" x WOF. Set aside for backing.

- DC7727 Dusk, DC7728 Fog, DC7729 Fog, Ochre, Sunset, Stream, DC7731 Redwood, Stone & Mist:

- Cut 1 strip 6" x WOF from each fabric. Subcut 8 triangles each as per **Diagram A** using the 60° triangle ruler.

- DC7727 Dusk

- Cut 1 strip 8" x WOF. Using **Template A**, subcut 8 triangles as per **Diagram A**.

- DC7732 Mist, Ochre, Sunset, Moss & DC7730 Stone:

- Cut 1strip 2 1/2" from each fabric. Subcut each into 15 rectangles (2 1/2" x 1 1/2").

- SC5333 Bright White

- Cut 2 strips 6" x WOF. Subcut 10 triangles as per **Diagram A** & 8 half-triangles as per **Diagram B**, using the 60° triangle ruler.


- Cut 2 strips 2 1/2" x WOF, Subcut 10 rectangles (2 1/2" x 5 1/2") and 8 rectangles (2 1/2" x 3").

- Cut 2 strips 2" x WOF.

- Cut 1 strip 3" x WOF.

- SC5333 Nickel


- Cut 5 strips 6" x WOF. Subcut 39 triangles as per **Diagram A** & 22 half-triangles as per **Diagram B**, using the 60° triangle ruler.
- Cut 8 strips 2 1/2" x WOF, Subcut 39 rectangles (2 1/2" x 5 1/2") and 38 rectangles (2 1/2" x 3").
- Cut 1 strip 8" x WOF. Using Template B, subcut 16 half-triangles as per Diagram B.
- Cut 7 strips 2" x WOF.
- Cut 5 strips 3" x WOF.
- Cut 2 strips 1" x WOF. Subcut into 8 rectangles (1" x 8 1/2").

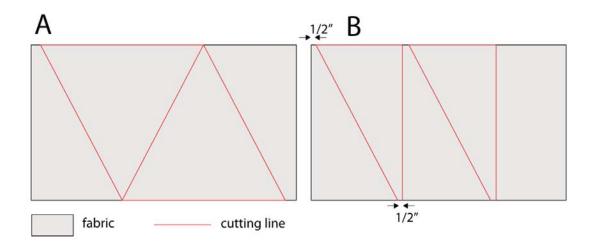


\*\* All seam allowances are 1/4".

#### **Making 8 Large Tree Blocks:**


- Using the 8 triangles and 16 half-triangles cut with **Templates A & B**, assemble 8 blocks as follows:
- Place a half-triangle ontop of a triangle, Right Sides Together (RST), so that the longest edge runs along the left edge of the triangle & the half-triangle's tip is at the bottom. Match the points at the top of the triangle. Sew along seam along left side. Press seams toward half-triangle.
- Place another half-triangle on top of this, RST, so that longest edge runs along the right edge of the triangle & the half-triangle's tip is at the bottom. Sew along right edge. Press seams toward the half-triangle.
- Square up blocks to 7 1/2" high x 6 1/2" wide, centering triangle & leaving 1/4" seam allowance beyond top triangle point.




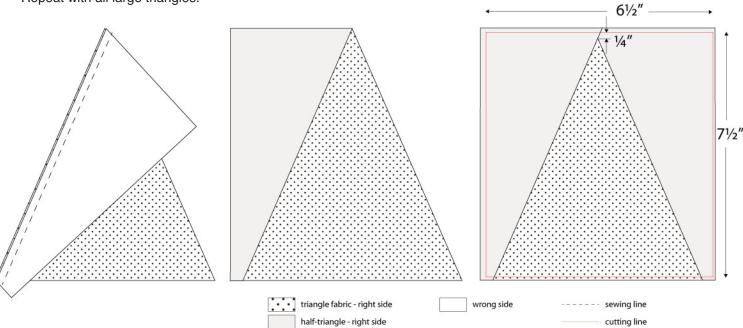

- Using 16 of the (2 1/2" x 3") Nickel rectangles, 8 of the assorted patterned fabric (2 1/2" x 1 1/2") rectangles and the 8 (1" x 8 1/2") Nickel rectangles, add the following to the blocks:
- With patterned small rectangle in the centre, sew together 2 Nickel rectangles and a patterned rectangle as in the following diagram. Press seams toward patterned rectangle.
- Sew to base of assembled triangle block. Press seams toward triangle.
- Sew the long Nickel rectangle to the top of the assembled triangle block. Press seams open.

Repeat with remaining blocks.







#### **Making Equilateral Tree Rows:**

Refer to the quilt photo for fabric placement, paying particular attention to the ground color in each row. Each row consists of 8 equilateral triangle trees (separated by equilateral triangle ground) and a Large Tree Block. The beginning and ending of each row (as well as on each side of the Large Tree Block) uses a half-triangle. Construct the rows as follows, pressing seams toward patterned fabrics:

- Sew a half-triangle ground fabric to a patterned triangle with the same method as the last blocks.
- Place a ground fabric triangle on top of the patterned triangle matching bottom right corners. Sew along right edge. Continue adding as many patterned and solid triangles as needed (eg. The top row, starting at the left, has 5 patterned triangles and 4 ground triangles before getting to the Large Tree Block) and end with another half-triangle.

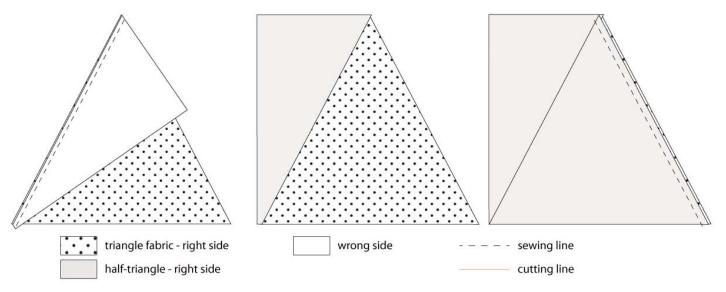

- Using the (2 1/2" x 5 1/2") ground fabric rectangles, the (2 1/2" x 3") ground fabric rectangles, the assorted patterned fabric (2 1/2" x 1 1/2") rectangles and the 2" strips of fabric, add the following to the rows:
- Under each half-triangle use a (2 1/2" x 3") rectangle of ground fabric. Under each patterned triangle use a patterned fabric (2 1/2" x 1 1/2") rectangle. Under each ground fabric triangle use a (2 1/2" x 5 1/2") rectangle of ground fabric. Sew together as in the following diagram.
- Sew to base of assembled triangle row. Press seams toward triangles.
- Measure a piece of the 2" strip the same as the width of theassembled row. Sew the strip to the top of the assembled row. Press seams open.
- Repeat with remaining rows and part-rows.

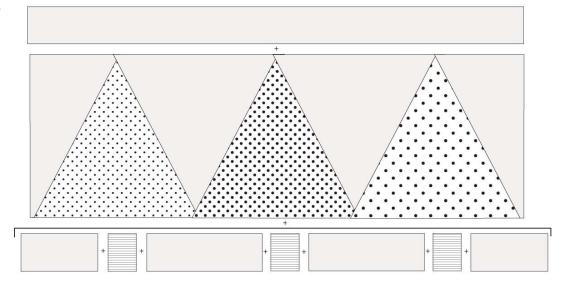

#### **Piecing Quilt Top:**

- Piece together the 3" strips of Nickel fabric, short ends together. Press seams open.
- For the 3rd and 5th tree rows, sew together the Large Tree Block and the row sections that have Nickel ground, aligning the **top** of the trees. Trim the Large Tree Blocks at the bottom to align with the Tree Rows. Add a piece of the 3" strip of Bright White to the bottom of the row sections with Bright White ground, and a piece of the 3" strip of Nickel to the bottom of the row sections with Nickel ground.
- Assemble each row, aligning the top of the trees. Trim the Large Tree Blocks at the bottom to align with the Tree Rows.
- Add a piece of the 3" Nickel strip to the base of the 1st and 7th row. Pin all rows together, paying attention to the fact that every other row has upside-down trees. Sew & press seams open.

### **Assembling Quilt:**

Sew together backing pieces along long edges. Press seam open.

Layer backing, batting and quilt top. Baste or pin.

Quilt as desired.

Square up quilt.

Join binding strips together and bind in your preferred fashion.